PCI express 3.0 x4 to x16 Extension Cable

Brand name: ADT-LINK

Product name:PCle x4 to x16 extension cable

Product model:R23SF

Transferspeed:PCIe3.0 x4 full speed, 32G/bps (Max.)

Wire length:3 ~ 100 cm, the length can be customized,

Application: PCIe x16 Video Card extension

ADT R23 series Part-Number Description:

| Part-Number | Description | Bandwidth |
|-------------|---|-------------|
| IR23SF | PCI-E x4 to x16 turn 90 degree upright right angle | PCIe 3.0 x4 |
| | extension cables | (32G/bps) |
| IR23SF-PW | PCI-E x4 to x16 turn 90 degree upright right angle | PCIe 3.0 x4 |
| | extension cables | (32G/bps) |
| R23SL | PCI-E x4 to x16 turn 180degreesplint verticalextension | PCIe 3.0 x4 |
| | cables | (32G/bps) |
| IR23SL-PW | PCI-E x4 to x16 turn 180degreesplint verticalextension | PCIe 3.0 x4 |
| | cables | (32G/bps) |
| R23SR | PCI-E x4 to x16 turn 270degreeinverted reverseextension | PCIe 3.0 x4 |
| | cables | (32G/bps) |
| R23SR-PW | PCI-E x4 to x16 turn 270degreeinverted reverseextension | PCIe 3.0 x4 |
| | cables | (32G/bps) |


R23: PCle x4 to x16

SL: turn 90 degree upright right angle; SF: turn 180 degree splint vertical; SR: turn 270 degree inverted reverse angle

-PW solder 4P power connector and bundle 15Pin SATA external power cable

Cable length Description:


The length of the wire refers to the part of the visible wire. It does not include the PCB and the connector. For the wire length, please refer to the 5cm blue arrow in the figure below.

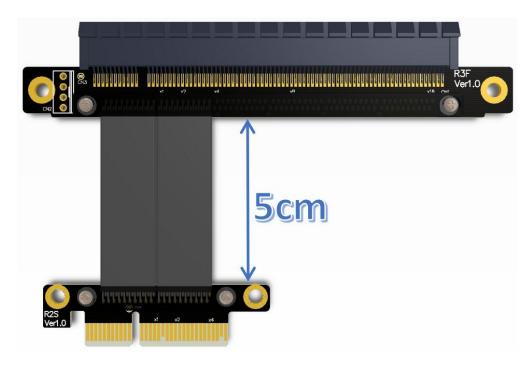

Q&A:

Is there any EMI shielding for Cable?

The extender utilizes the latest materials for EMI shielding with five sole flat cables design. This technique allows each cable to be fully covered by electromagnetic interference shielding with conducting polymer to guard against incoming or outgoing emissions of electromagnetic frequencies, minimize disturbance and degradation on performance, and reduce the weight of the extender.

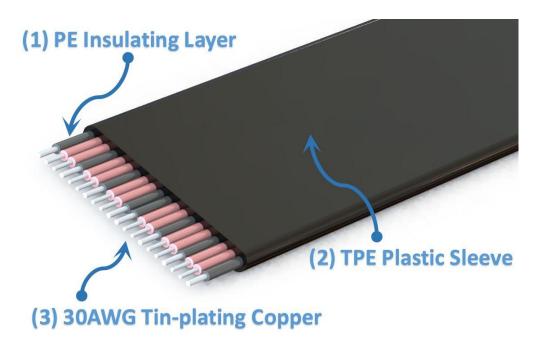


What is the thickness of the cable? Is it soft? Can it be bent?

 $The \ thickness \ of \ the \ cable \ wire \ is \ 1.4mm, so \ the \ wire \ is \ softer. \ The \ wire \ can be bent \ or \ folded, but \ do \ not \ pull \ it.$



Photo:



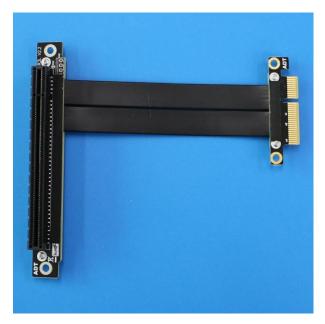



Download:

To open 3D PDF files. Please use Adobe Reader DC software.

FTP: Los Angeles

3D STEP & PDF files download http://www.adt.link/Uploads/download/ADT_R23_3D.zip

FTP: Hong Kong

3D STEP & PDF files download http://www.adtlink.cn/Uploads/download/ADT_R23_3D.zip

WebShop:

http://www.adt.link/product/R23-Shop.html

PREVIOUS: R21SF, R21SL, R21SRNEXT: R23SR