

PCI express 3.0 x4 to U.2 (SFF-8639) Extension Cable

Brand name: ADT-LINK

Product name: PCIe x4 to U.2 extension cable

Product model: R27SF

Transferspeed:PCIe3.0 x4 full speed, 32G/bps (Max.)

Wire length: 3 - 100 cm, the length can be customized,


Application: PCIe x4 to U.2 (SFF8639) extension

ADT R22 series Part-Number Description:

Part-Number	Description	Bandwidth
R27SF	U.2 cable turn 180 degree splint vertical extension	PCIe 3.0 x4 (32G/bps)

Cable length Description:


The length of the wire refers to the part of the visible wire. It does not include the PCB and the connector. For the wire length, please refer to the 5cm blue arrow in the figure below.

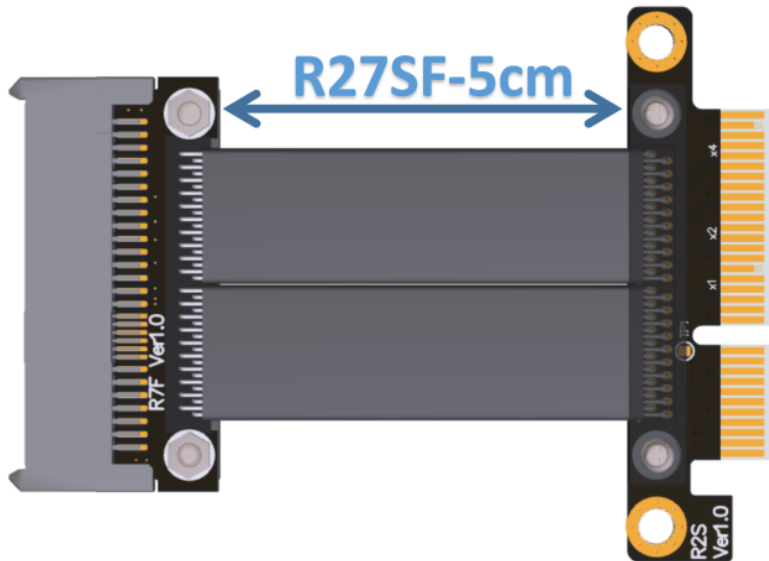

Q&A:

Is there any EMI shielding for Cable?

The extender utilizes the latest materials for EMI shielding with five sole flat cables design. This technique allows each cable to be fully covered by electromagnetic interference shielding with conducting polymer to guard against incoming or outgoing emissions of electromagnetic frequencies, minimize disturbance and degradation on performance, and reduce the weight of the extender.

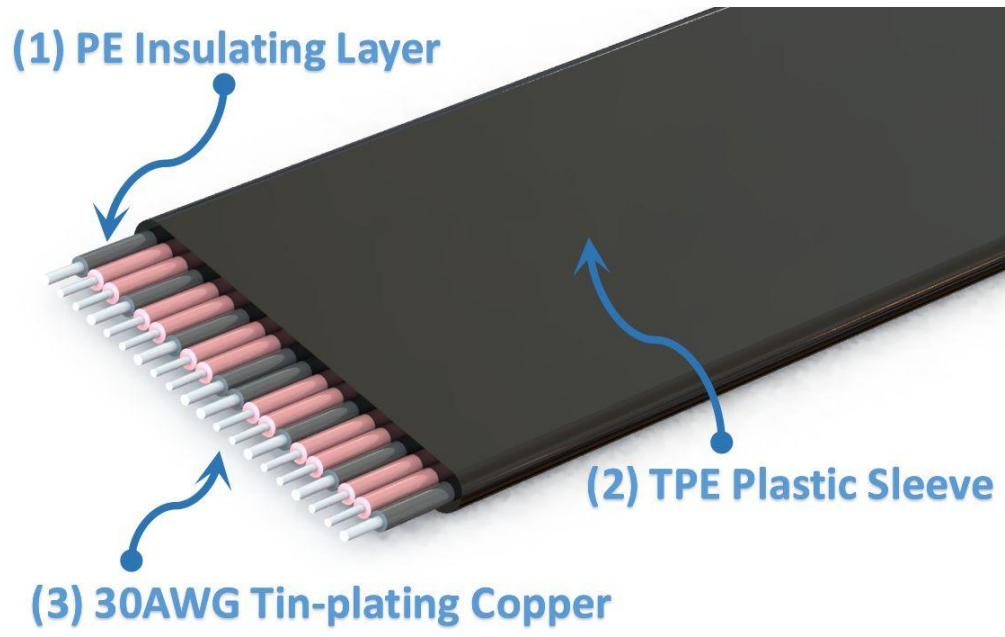



What is the thickness of the cable? Is it soft? Can it be bent?



The thickness of the cable wire is 1.4mm, so the wire is softer. The wire can be bent or folded, but do not pull it.




Photo:

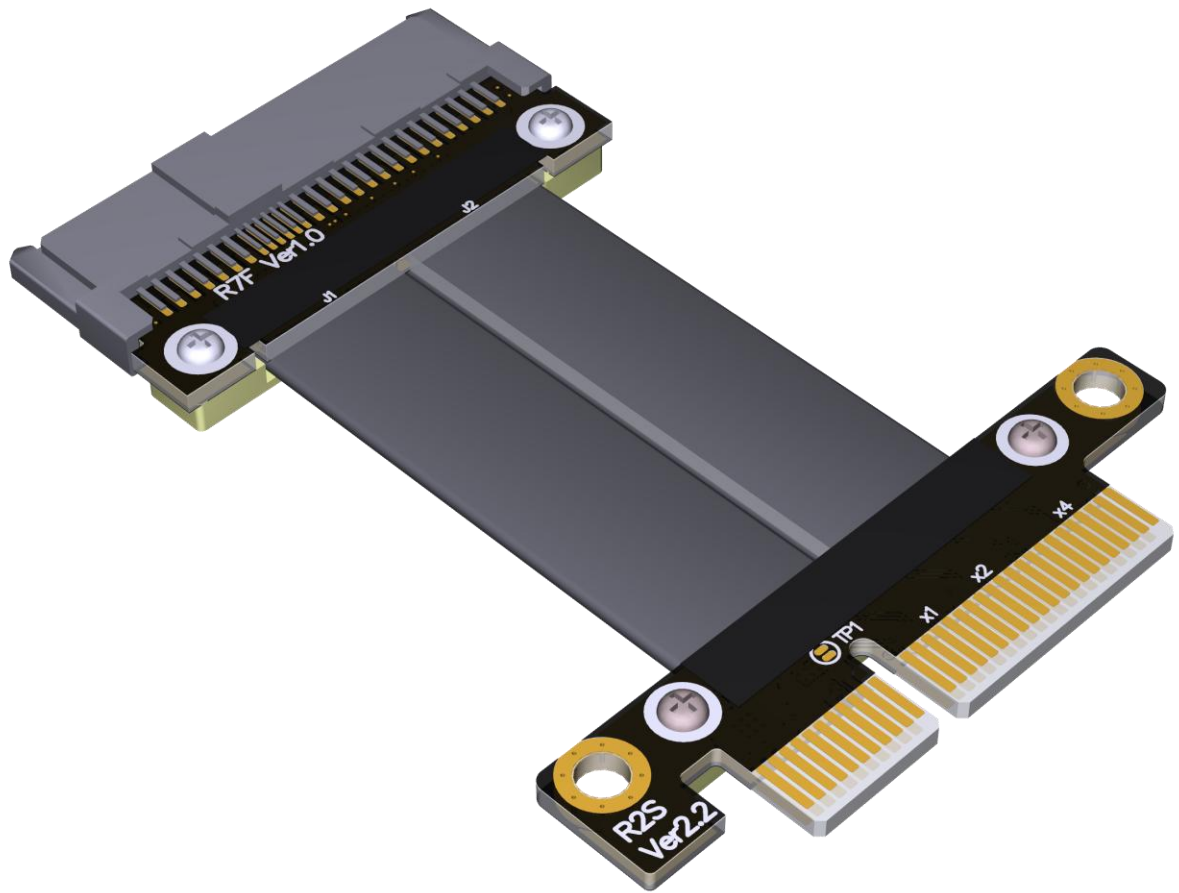

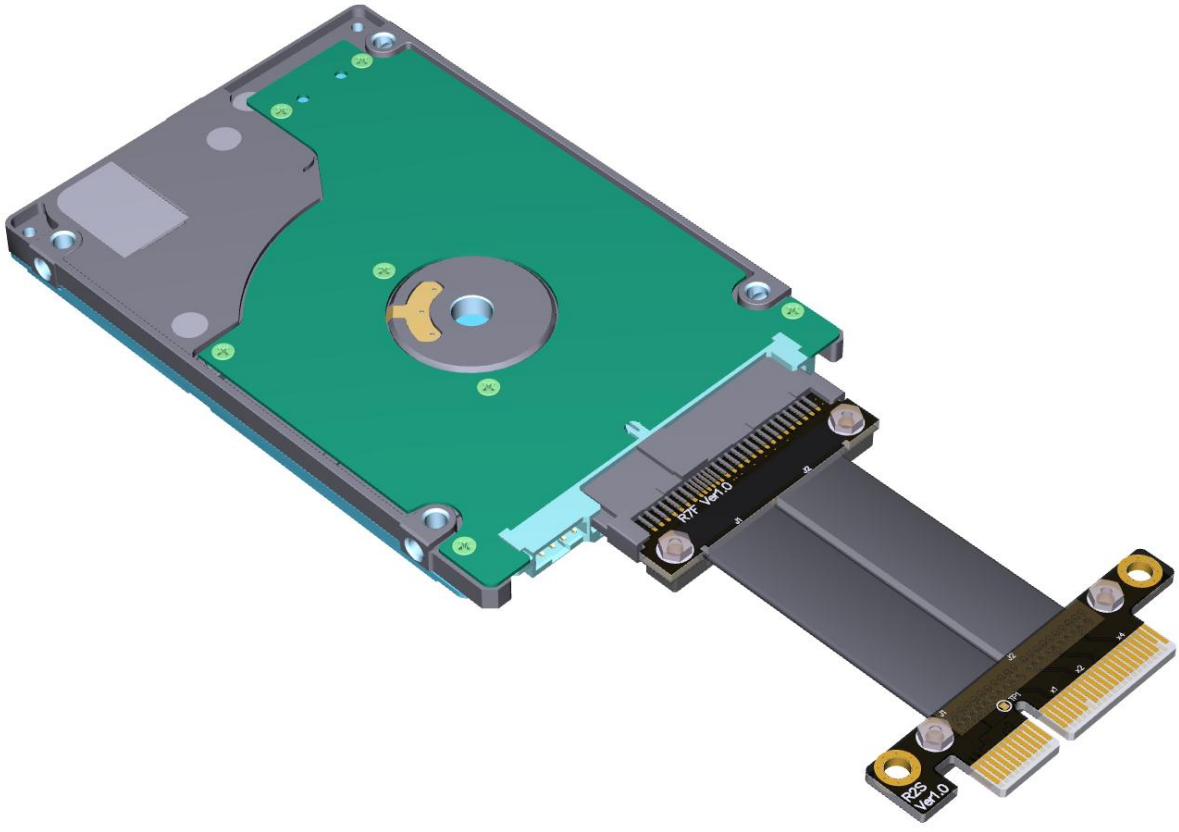

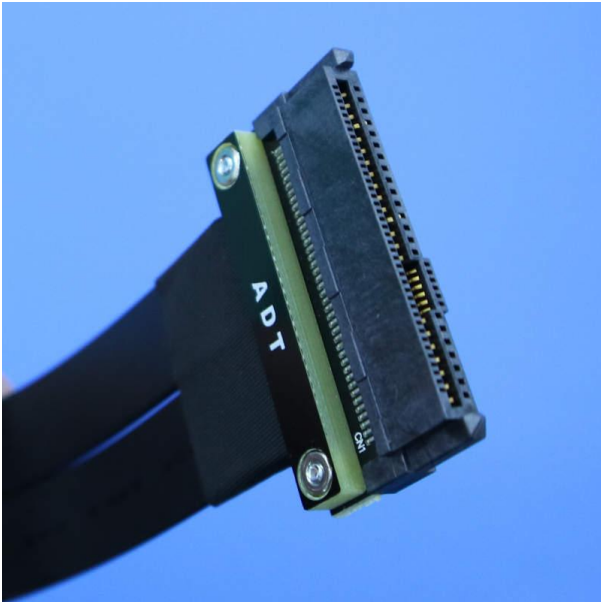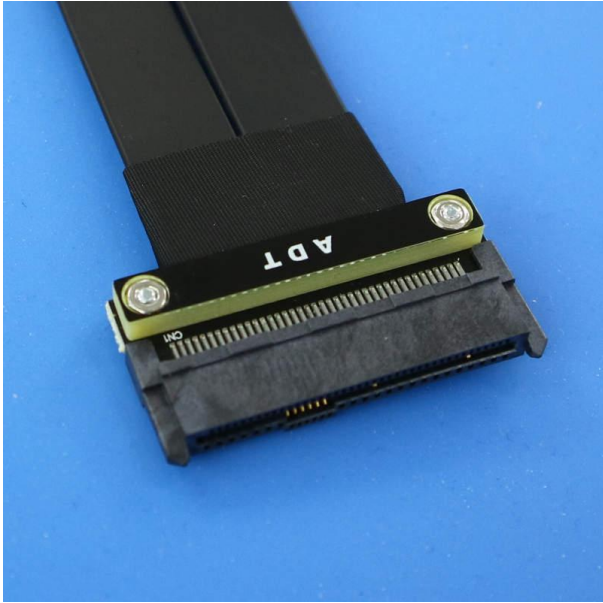

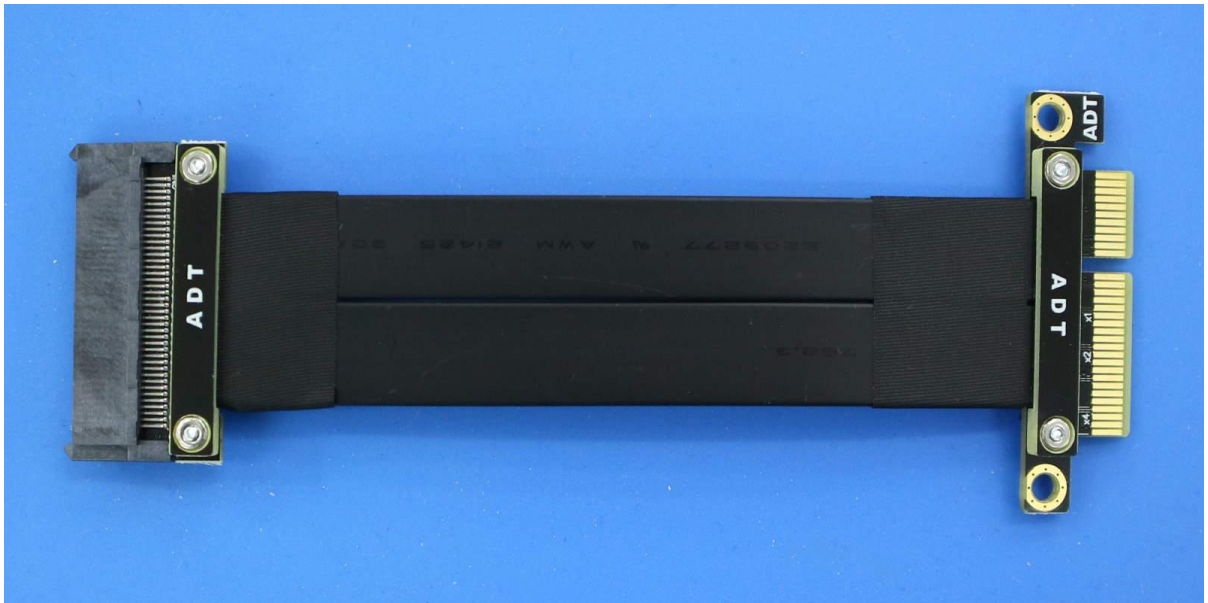

Download:

To open 3D PDF files. Please use [Adobe Reader DC](#) software.

FTP: Los Angeles

3D STEP & PDF files download http://www.adt.link/Uploads/download/ADT_R27_3D.zip

FTP: Hong Kong

3D STEP & PDF files download http://www.adtlink.cn/Uploads/download/ADT_R27_3D.zip

WebShop:

<http://www.adt.link/product/R27-Shop.html>

PREVIOUS : [R27SLNEXT](#) : [R23 \(Shop\)](#)