

PCI express 4.0 x1 to x4 Extension Cable

Brand name: ADT-LINK

Product name: PCIe x1 to x4 extension cable

Product model: R12SF 4.0 ; R12SL 4.0

Transferspeed:PCIe4.0 x1 to x4 , 16G/bps (Max.)

Wire length: 5 ~ 100 cm, the length can be customized,

Application: PCIe x4 NVMe SSD, LAN, USB cards to PCIe x1 slot extension riser cable

Usage restrictions: PCIe 4.0 has high requirements on the equipment. As long as the extension cable is connected, the signal will be attenuated. This product does not guarantee the full speed of PCI-E 4.0. The equipment is aging. If the signal is poor or the environment is not good, please slow down to PCIe 3.0 or lower.

Item List:

Part-Number	Description	Bandwidth
R12SF 4.0	PCI-E x1 to x4 turn 180degreesplint verticalexension cables.	PCIe 4.0 x1 (16G/bps)
R12SL 4.0	PCI-E x1 to x4 turn 90 degree upright right angle extension cables	PCIe 4.0 x1 (16G/bps)
R12SL-TL 4.0	PCI-E x1 to x4 turn dual 90 degree uprightdual right angle extension cables.	PCIe 4.0 x1 (16G/bps)

Part-Number Description:

R12: PCIe x1 to x4

SL: turn 90 degree upright right angle ; SF: turn 180 degree splint vertical ; SR: turn 270 degree inverted reverse angle


-WK: GPU mining cost-down version.

-FL: PCIe edge turn 90 degree.

-PA2 including 2PCS magnetic feet ; -PA4 including 4PCS magnetic feet and PCB-PAD

Cable length Description:


The length of the wire refers to the part of the visible wire. It does not include the PCB and the connector. For the wire length, please refer to the 5cm arrow in the figure below.

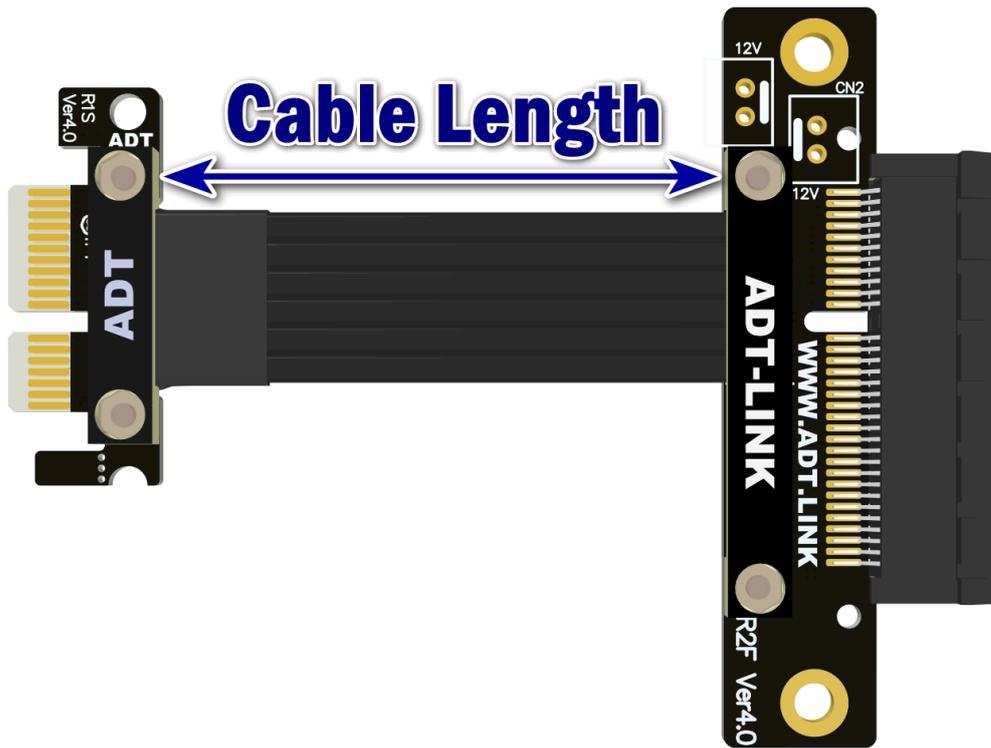

Q&A:

Is there any EMI shielding for Cable?

With metal shield. The extender utilizes the latest materials for EMI shielding with five sole flat cables design. This technique allows each cable to be fully covered by electromagnetic interference shielding with conducting polymer to guard against incoming or outgoing emissions of electromagnetic frequencies, minimize disturbance and degradation on performance, and reduce the weight of the extender.

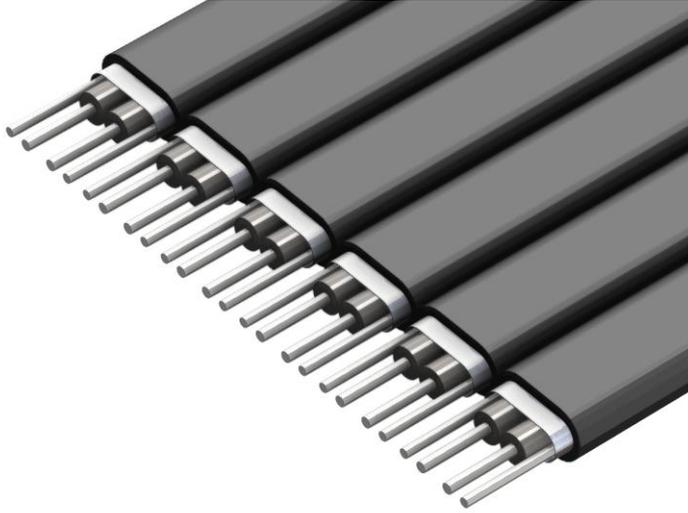

What is the thickness of the cable? Is it soft? Can it be bent?

The thickness of the cable wire is 1.4mm, so the wire is softer. The wire can be bent or folded, but do not pull it.


Photo:



R12SF 4.0



R12SL 4.0

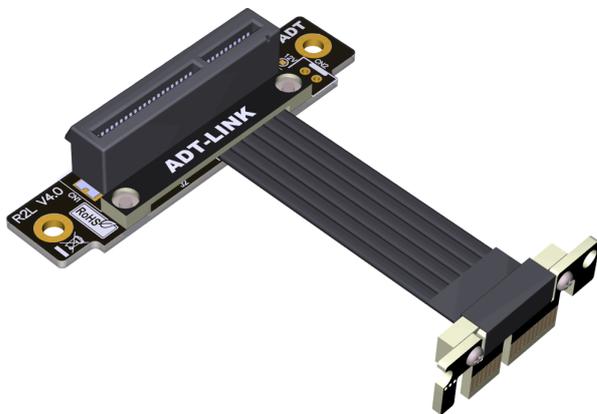

R12SL-TL 4.0

Download:

To open 3D PDF files. Please use [Adobe Reader DC](#) software.

FTP: Los Angeles

3D files download http://www.adt.link/Uploads/download/ADT_R12V4_3D.zip

FTP: Hong Kong

3D files download http://www.adtlink.cn/Uploads/download/ADT_R12V4_3D.zip

WebShop:

<http://www.adt.link/product/R12V4-Shop.html>

PREVIOUS : [R18SF](#), [R18SL 4.0](#)NEXT : [R21SF](#), [R21SL 4.0](#)